




Round, stackable, wire mesh baskets available in a choice of gauge and spacing combinations.

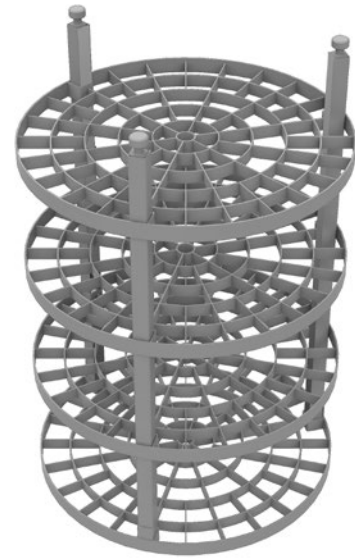

Rack with height adjustable trays in choice of three load capacities. Optional tray mesh liner also available.

FURNACE SERIES	BASKET * †				RACK * (Maximum Capacity per Tray)			
	Maximum Capacity per Basket	Outside Height	Inside Height	Basket Weight **	Light Duty	Heavy Duty	Super HD	Rack Weight ‡
NX-6xx	200 kg 440 lb	500 mm 19.7"	460 mm 18.1"	22 kg 49 lb	200 kg 440 lb	375 kg 825 lb	500 kg 1100 lb	34-44 kg 75-97 lb
NX-8xx	400 kg 880 lb		455 mm 17.9"	32 kg 71 lb	375 kg 825 lb	500 kg 1100 lb	750 kg 1650 lb	60-85 kg 132-187 lb
NX-10xx	600 kg 1320 lb		450 mm 17.7"	49 kg 108 lb	500 kg 1100 lb	750 kg 1650 lb	1000 kg 2200 lb	118-145 kg 260-320 lb
NX-12xx	800 kg 1760 lb		440 mm 17.3"	55 kg 121 lb	750 kg 1650 lb	1000 kg 2200 lb	1225 kg 2700 lb	110-197 kg 243-434 lb
NX-16xx	1100 kg 2425 lb	478 mm 18.8"	418 mm 16.5"	103 kg 227 lb	-	-	-	-
NXK-4xx	100 kg 220 lb	300 mm 11.8"	270 mm 10.6"	8 kg 18 lb	100 kg 220 lb	-	-	19-22 kg 42-49 lb
NXK-6xx	200 kg 440 lb		260 mm 10.2"	18 kg 40 lb	200 kg 440 lb	375 kg 825 lb	500 kg 1100 lb	34-44 kg 75-97 lb
NXK-8xx	250 kg 550 lb		255 mm 10"	27 kg 60 lb	375 kg 827 lb	500 kg 1100 lb	750 kg 1650 lb	60-85 kg 132-187 lb


* The number of baskets or trays a furnace can hold depends on the furnace height and load capacity of the furnace.

† Mesh basket available in choice of wire gauge/spacing : 2mm / 12.7mm (center to center) or 3 mm / 25.4 mm (c to c) [5/64" / 1/2" or 3/8" / 1"]

** Weight based on 1 basket; the number of baskets will vary according to the furnace height.

‡ Rack weight includes the support structure (base tray with columns) and 3 trays.

ACCESSORIES



Liner & Separator

Woven wire mesh liner installs over tray to ensure a more stable surface for placement of small parts. Wire mesh also serves as a separator for dividing basket into sections.



Lifting Device

Lifting device securely mounts to the support columns of the furnace basket or rack for safe loading and unloading operations.

CANADA / USA

+1 514 335 7191
nitrex@nitrex.com

POLAND

+48 32 296 66 30
nitrex.europe@nitrex.com

CHINA

+86 (0) 10 6257 3050
nitrex.china@nitrex.com

JAPAN

+81 (0) 3 6369 8167
nitrex.japan@nitrex.com